

**Corrugated Stainless Steel Flexible  
Connectors for FLECK7000®  
bypass  
Specification Sheet**

**SPECIFICATION:**

Furnish and install Corrugated Stainless Steel Connector for FLECK® bypass

**DESIGN FEATURES: Mega-flow SUPER Water-flex™**

- 304 Series Stainless Steel
- Easy Installation
- Installs to FLECK® Bypass
- Maintains optimum flow – no restriction
- Kink and Crimp Free
- Chromed brass nuts
- Extremely Flexible
- Will not corrode or rust
- No Dielectric union required
- Highest Quality EPDM washer
- Resists work hardening
- Burst pressure approx 1850 psi
- 100% Leak Tested
- Working pressure 200 psi
- No Sweat Installation
- Lifetime Warrantee
- Temperature rating -40 to 220 degrees F
  
- Bright annealed


**COMPLIANCES/LISTINGS:**

- \* ICC-ES PMG
- \* ICC Listed, Tested & Certified
- \* UPC, IPC, IMC, IRC (USA)
- \* Low Lead Compliant California H & S Code 116875
- \* ASME A112.18.6/CSA B125.6-2009 Compliant
- \* NSF-61 (ICC-ES PMG Certified to ANSI/NSF section 9)
- \* State of Wisconsin

<u>Model #</u>	<u>Description</u>	<u>Length</u>
<b>Fleck-1-18</b>	<b>(Fleck QC* x 1" FIP)</b>	<b>18"</b>
<b>Fleck-114-18</b>	<b>(Fleck QC x 114" FIP)</b>	<b>18"</b>

**\*Quick connect fittings require Fleck O-ring**

ICC-ES PMG listing pending

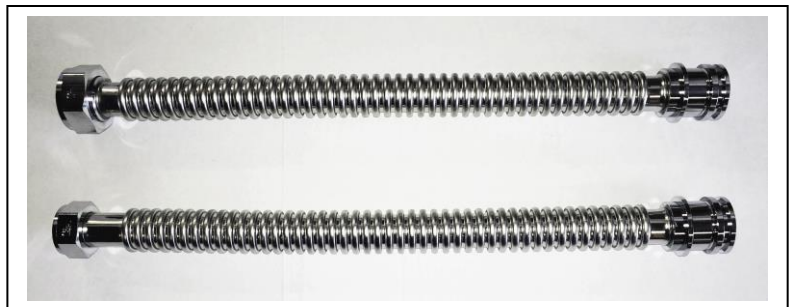

Product Submittal

Job Name: \_\_\_\_\_

Date: \_\_\_\_\_

Model# \_\_\_\_\_ Quantity: \_\_\_\_\_

Architect/Contractor: \_\_\_\_\_