



The Original Since 1981

43153 Business Park Dr. Temecula, CA 92590


Email: info@falconstainless.com

www.falconstainless.com

TEL: (818) 767-3569

FAX: (818) 768-8533

Toll Free 1-800-814-8444

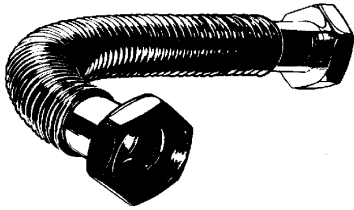

**Corrugated Stainless Steel Flexible
Water Heater/ Softener Connectors
Specification Sheet**

SPECIFICATION:

Furnish and install Corrugated Stainless Steel
Push-to-Connect Water Heater/Softener Connector

COMPLIANCES/LISTINGS:

- * ICC-ES PMG
- * ICC Listed, Tested & Certified
- * UPC, IPC, IMC, IRC (USA)
- * Low Lead Compliant California Health & Safety Code 16875
- * ASME A112.18.6/CSA B125.6-2009 Compliant
- * NSF-61 (ICC-ES PMG Certified to ANSI/NSF section 9)
- * State of Wisconsin, Commonwealth of Massachusetts

DESIGN FEATURES: Mega-flow SUPER Water-flex™

- 304 Series Stainless Steel
- Push-to-Connect John Guest Fitting
- Installs onto pipe of copper/CPVC/PEX
- Maintains optimum flow – no restriction
- Kink and Crimp Free
- Dupont Zytel Nylon Nut
- Extremely Flexible
- Will not corrode or rust
- No Dielectric union required
- Highest Quality EPDM washer
- Resists work hardening
- Burst pressure approx 1850 psi
- 100% Leak Tested
- Working pressure 200 psi
- No Sweat Installation
- Lifetime Warrantee
- Temperature rating -40 to 220 degrees F
- Bright annealed

<u>Model #</u>	<u>Description</u>	<u>Length</u>
PTC34JG-1N	3/4"PTC x 1" Nylon FIP	18"
PTC34JG-1N	3/4"PTC x 1" Nylon FIP	24"
PTCJG= Push to Connect John Guest fitting		



Product Submittal

Job Name: _____

Date: _____

Model# _____ Quantity: _____

Architect/Contractor: _____

ANSI/NSF 61



Compliant to AB1953

ASME A112.18.6